



SUPPLY



SOFT SUCTION



POTABLE WATER



USA MADE

ENHANCE FLOW AND VISIBILITY ON THE FIREGROUND

KRYPTONITE™ LDH gives fire departments that extra edge, in flow and support—all in a high-visibility lightweight supply line. A tough polyurethane outer cover combines with an exclusive thru-the-weave liner to offer greater resistance to punctures and abrasion. But it doesn't stop there. Kryptonite is compact, taking up less room in the hose bed, and durable—with higher resistance to oils, chemicals and ozone. **Snag proof and kink resistant, Kryptonite will not mildew or rot and is guaranteed for life to never delaminate.**

FEATURES


Typical rubber extruded fire hose can vary in thickness, becoming bulky and heavy. Kryptonite™ LDH incorporates a circular woven polyester jacket that is completely encapsulated by a special urethane polymer that provides superior abrasion and puncture resistance while remaining extremely light and service worthy.

- Kryptonite™ weighs 20% less than conventional rubber supply hose.
- Reinforced woven polyester jacket provides increased puncture resistance.
- Extruded thru-the-weave polyurethane construction and ultra smooth liner minimizes friction loss.
- Engineered to deliver more flow and more efficient packability.
- Remains flexible to -50°F (-46°C).
- Resists ozone, oxidation and most chemical/petroleum products.
- Manufactured in accordance with NFPA 1961 Standard, latest edition.
- Made in USA to ISO-9001 certified quality management system.

Snap-tite
HOSE

Polyester Fabric Reinforcement

Polyurethane Thru-the-Weave

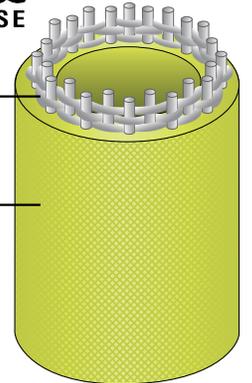

CONSTRUCTION

Extruded Thru-the-Weave Polyurethane

TEMPERATURE RANGE

-50°F to 160°F (-46°C to 71°C)

COUPLINGS

Aluminum NH/NST or IPT Threaded & Aluminum Storz

COLORS

Hi-Viz Green Blaze Orange





HOSE SIZING AND SPECIFICATIONS

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 100' COUPLED)	FLAT WIDTH	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	IN
4"	200 (1380)	400 (2760)	600 (4140)	72 (32.7)	6 ¼"	4 ⅝"
5"	200 (1380)	400 (2760)	600 (4140)	97 (44)	7 ¾"	5 ⅝"

As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.

HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
UTX	40 = 4" 50 = 5"	X	50 = 50' 100 = 100'	G = Hi-Viz Green O = Blaze Orange	40 = 4" 50 = 5"	N = NH I = IPT S = Storz	Aluminum

Part No. Example: UTX50X100G50S = Kryptonite Hose, 5" ID by 100' Length, Hi-Viz Green, 5" Storz Aluminum Coupling



ALL-AMERICAN HOSE™

all-americanhose.com | 814-438-7616 | 217 Titusville Road, Union City, PA 16438 USA